

VERIFICATION

The undersigned, of the below address, hereby certifies that he/she well knows both the English and Japanese languages, and that the attached is an accurate English translation of the Japanese Patent application filed on January 16, 2003 under No. P2003-008754.

The undersigned declares further that all statements made herein of his/her own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signed this 1st day of November, 2007.

Signature:

  
Name: Shiro TERASAKI

Address: c/o Soei Patent & Law Firm Ginza First Bldg.,  
10-6, Ginza 1-chome, Chuo-ku, Tokyo 104-0061  
Japan

**JAPAN PATENT OFFICE**

**This is to certify that the annexed is a true copy of the following  
application as filed with this Office.**

**Date of Application: January 16, 2003**

**Application Number: Japanese Patent Application  
No. 2003-008754**

**Applicant(s): NTT DoCoMo, Inc.**

**Commissioner,**

**Patent Office**

**(Seal)**

(Document Name) Patent Application  
(Reference Number) 14-0393  
(Presentation Date) January 16, 2003  
(Directly) Commissioner of the Patent Office  
(IPC) H04Q 7/00

(Inventor)

(Residence or Address)

c/o NTT DoCoMo, Inc., 11-1, Nagatacho 2-chome, Chiyoda-ku,  
Tokyo, Japan

(Name) Masafumi MASUDA

(Inventor)

(Residence or Address)

c/o NTT DoCoMo, Inc., 11-1, Nagatacho 2-chome, Chiyoda-ku,  
Tokyo, Japan

(Name) Kazunori OBATA

(Inventor)

(Residence or Address)

c/o NTT DoCoMo, Inc., 11-1, Nagatacho 2-chome, Chiyoda-ku,  
Tokyo, Japan

(Name) Yutaka OHTO

(Applicant)

(Identification Number) 392026693

(Name) NTT DoCoMo, Inc.

(Attorney)

2003-008754

(Name) NTT DoCoMo, Inc.

(Attorney)

(Identification Number) 100088155

(Patent Attorney)

(Name) Yoshiki HASEGAWA

(Attorney)

(Identification Number) 100092657

(Patent Attorney)

(Name) Shiro TERASAKI

(Attorney)

(Identification Number) 100114270

(Patent Attorney)

(Name) Tomoya KUROKAWA

(Attorney)

(Identification Number) 100108213

(Patent Attorney)

(Name) Toyotaka ABE

(Attorney)

(Identification Number) 100113549

(Patent Attorney)

(Name) Mamoru SUZUKI

(Official Fee)

(Pre-Paid Master Note Number) 014708

(Amount to be paid) 21000

(Lists of the Article to be presented)

(Name of Article) Specification 1

2003-008754

(Name of Article) Drawing 1

(Name of Article) Abstract 1

(Proof Reading) Required

[Document Name] Specification

[Title of the Invention] RADIO CONTROL DEVICE AND  
METHOD OF SELECTING SPREAD CODE

[Claims]

5           [Claim 1] In a radio communication system where  
multiple radio access using spectrum spread is made between  
a mobile station and a base station and a plurality of cells  
with different frequency bands exist at the same location, a  
radio control device for controlling a plurality of base stations  
10 forming the plurality of cells, comprising:

code selection trial means for each cell, provided in  
association with each of the plurality of cells, for trying to  
select a spread code for the associated cell under a  
predetermined condition;

15           determination means for determining whether to try to  
select a spread code again under a different condition from  
the condition that has been used in the selection trial, when  
the selection trial of the spread code by each code selection  
trial means under the predetermined condition has been  
20 terminated without any successful selection of the spread  
code; and

control means for controlling the code selection trial  
means and the determination means so as to cause the code  
selection trial means to try to select the spread code  
25 sequentially for the plurality of cells under the predetermined  
condition, cause the determination means to determine

whether to try to select the spread code again under the different condition from the condition that has been used in the selection, after the termination of the selection trial by each code selection trial means, and cause the code selection trial means to try to select the spread code sequentially for the plurality of cells under the different condition when it has been determined that the selection should be tried again.

[Claim 2] The radio control device according to claim 1, wherein:

each cell of the radio communication system is associated with a plurality of spread code trees generated by OVSF (Orthogonal Variable Spreading Factor), and

the different condition is associated with a selection trial from a spread code tree different from the spread code tree that has already been used in the selection trial.

[Claim 3] A method of selecting a spread code in a radio communication system where multiple radio access using spectrum spread is made between a mobile station and a base station and a plurality of cells with different frequency bands exist at the same location, comprising:

trying to select a spread code sequentially for the plurality of cells under a predetermined condition;

determining whether to try to select a spread code again under a different condition from the condition that has been used in the selection, when the selection trial for each cell has been terminated without any successful selection of

the spread code; and

trying to select the spread code sequentially for the plurality of cells under the different condition when it has been determined that the selection should be tried again.

5 [Detailed Description of the Invention]

[0001]

[Technical Field to which the Invention Pertains]

10 This invention relates to a method of selecting a spread code in a radio communication system where multiple radio access using spectrum spread is made between a mobile station and a base station and a plurality of cells with different frequency bands exist at the same location, and relates to a radio control device for controlling a plurality of  
15 base stations forming a plurality of cells in the radio communication system.

[0002]

[Prior Art]

20 A typical example of a mobile radio communication system where multiple radio access is made using spectrum spread is the W-CDMA (Wideband - Code Division Multiple Access) system in IMT-2000 (International Mobile Telecommunications - 2000). In the downlink communication of the W-CDMA system, a cell is identified by  
25 a spread code called scrambling code, and a channel is identified by a spread code called channelization code



5 subsidiary to the scrambling code. The spread is a double spread based on these two codes. In addition, channelization codes subsidiary to the same scrambling code can be generated by a rule called OVSF (Orthogonal Variable Spreading Factor), and the orthogonality as OVSF is maintained if there is no time shift. On the other hand, channelization codes subsidiary to different scrambling codes have a correlation with each other regardless of time shift.

[0003]

10 Although there is typically one scrambling code for each cell, a method of assigning a plurality of different scrambling codes to the same cell has been devised in order to expand the channelization code resource. Here, the first scrambling code is called "primary scrambling code", and the  
15 second and subsequent scrambling codes are called "secondary scrambling codes". In this situation, in general, channelization codes subsidiary to the primary scrambling code are preferentially selected, and only if they are no more available, channelization codes subsidiary to the secondary  
20 scrambling code are selected. This is because it is desirable to use channelization codes subsidiary to the same scrambling code as many as possible in order to prevent increase of interference components due to the correlation of the channelization codes and to attempt to secure the system  
25 capacity, since channelization codes subsidiary to different scrambling codes, as mentioned above, have a correlation

with each other regardless of time shift.

[0004]

Now, a plurality of frequency bands can be used by direct spread in the W-CDMA system. For example, if a  
5 frequency band f1 and a frequency band f2 exist, a cell of f1 and a cell of f2 can be used at the same location as overlaid distinct cells. Here, Patent Literature 1 proposes the following control. When a mobile station which can use only f2 and a mobile station which can use both f1 and f2 are  
10 located together in the same service area, in order to reserve the channelization code resource of f2 for the mobile station which can use only f2, the mobile station which can use both f1 and f2 is allowed to select preferentially channelization codes of the cell of f1, and only when they are no more  
15 available, select channelization codes of the cell of f2.

[0005]

As a method of carrying out such control, a method as shown in FIG. 3 can be contemplated. First, a radio resource selection unit for frequency band f1 tries to select a  
20 channelization code belonging to the primary scrambling code of f1 (S31, S32). If the selection has been successful, the selected channelization code is outputted (S40). Otherwise, if the selection has been failed, the same radio resource selection unit for frequency band f1 tries to select a  
25 channelization code belonging to the secondary scrambling code of f1 (S33, S34). If the selection has been failed here

again, a radio resource selection unit for frequency band f2, in the same way as described above, tries to select a channelization code belonging to the primary scrambling code of f2 (S35, S36) and tries to select a channelization code belonging to the secondary scrambling code of f2 (S37, S38). Nevertheless if the selection has been failed, information indicating "selectable channelization code not found" is outputted (S39).

[0006]

10

[Patent Literature 1]

Japanese patent laid-open publication Heisei 7-23447

[0007]

[Problem to be Solved by the Invention]

15

However, in this method shown in FIG. 3, since the selection trial of a channelization code belonging to the secondary scrambling code of frequency band f1 (S33) is carried out before the selection trial of a channelization code belonging to the primary scrambling code of frequency band f2 (S35), channelization codes belonging to the secondary scrambling code are selected more frequently in the cell of frequency band f1. For this reason, interference components between channelization codes belonging to the primary scrambling code and channelization codes belonging to the secondary scrambling code may increase in the cell of frequency band f1, and thus the capacity of the cell of frequency band f1 will be reduced, which may cause the

20

25

overall system capacity to be reduced.

[0008]

The present invention has been made in view of the above-mentioned problem. An object of the invention is to provide a radio control device and a method of selecting a spread code which can prevent reduction of the system capacity due to the use of channelization codes belonging to the secondary scrambling code.

[0009]

[Means for Solving the Problem]

In order to achieve the above-mentioned object, a radio control device according to the present invention is, in a radio communication system where multiple radio access using spectrum spread is made between a mobile station and a base station and a plurality of cells with different frequency bands exist at the same location, a radio control device for controlling a plurality of base stations forming the plurality of cells, comprising: code selection trial means for each cell, provided in association with each of the plurality of cells, for trying to select a spread code for the associated cell under a predetermined condition; determination means for determining whether to try to select a spread code again under a different condition from the condition that has been used in the selection trial, when the selection trial of the spread code by each code selection trial means under the predetermined condition has been terminated without any successful

selection of the spread code; and control means for controlling the code selection trial means and the determination means so as to cause the code selection trial means to try to select the spread code sequentially for the plurality of cells under the predetermined condition, cause the determination means to determine whether to try to select the spread code again under the different condition from the condition that has been used in the selection, after the termination of the selection trial by each code selection trial means, and cause the code selection trial means to try to select the spread code sequentially for the plurality of cells under the different condition when it has been determined that the selection should be tried again.

[0010]

15 Namely, the radio control device according to the present invention is provided in a radio communication system where multiple radio access using spectrum spread is made between a mobile station and a base station and a plurality of cells with different frequency bands exist at the same location. In addition to the code selection trial means for each cell that is provided in association with each of the plurality of cells, this radio control device comprises determination means and control means which have not conventionally existed, and the following operations are carried out under the control of the control means. First, the code selection trial means tries to select a spread code

sequentially for the plurality of cells under a predetermined condition. Namely, the selection of the spread code is not tried for one cell under a plurality of conditions in a conventional manner, but the selection of the spread code is  
5      tried sequentially for the plurality of cells under the predetermined condition. Then, when the selection trial of the spread code by each code selection trial means has been terminated without any successful selection of the spread code, the determination means determines whether to try to select a  
10      spread code again under a different condition from the condition that has been used in the selection. Here, when it has been determined that the selection should be tried again, the code selection trial means tries to select a spread code sequentially for the plurality of cells under the different  
15      condition. In the above determination, it may be determined that the selection is always tried again if the selection of the spread code has been failed, or it may be determined that the selection is not tried again in order to completely avoid the interference caused by the use of spread codes for one cell  
20      under the plurality of conditions.

[0011]

As mentioned above, instead of trying to select a spread code for one cell under a plurality of conditions in a conventional manner, the code selection trial means tries to  
25      select a spread code sequentially for a plurality of cells under a predetermined condition. When the determination means

determines that the selection of the spread code should be tried again under a different condition, selection of the spread code is tried under the different condition. This can prevent a situation where interference components are increased and the capacity of the cell is reduced by the use of spread codes for one cell under a plurality of conditions (for example, both the channelization code belonging to the primary scrambling code and the channelization code belonging to the secondary scrambling code are used for one cell). As a result, reduction of the system capacity can be prevented. In addition, according to the present invention, the probability of selecting spread codes for different cells may be increased. However, interference between the selected spread codes for the different cells does not matter because the frequency bands differ between the different cells.

[0012]

More specifically, each cell of the radio communication system is associated with a plurality of spread code trees generated by OVSF, and the different condition is associated with a selection trial from a spread code tree different from the spread code tree that has already been used in the selection trial.

[0013]

The invention related to the above-mentioned radio control device can also be described as an invention related to a method of selecting a spread code. Namely, the method of

selecting a spread code according to the present invention is a method of selecting a spread code in a radio communication system where multiple radio access using spectrum spread is made between a mobile station and a base station and a plurality of cells with different frequency bands exist at the same location, comprising: trying to select a spread code sequentially for the plurality of cells under a predetermined condition; determining whether to try to select a spread code again under a different condition from the condition that has been used in the selection, when the selection trial for each cell has been terminated without any successful selection of the spread code; and trying to select the spread code sequentially for the plurality of cells under the different condition when it has been determined that the selection should be tried again.

[0014]

By carrying out such a method of selecting a spread code, instead of trying to select a spread code for one cell under a plurality of conditions in a conventional manner, selection of a spread code is tried sequentially for a plurality of cells under a predetermined condition. When it is determined that the selection of the spread code should be tried again under a different condition, selection of the spread code is tried under the different condition. This can prevent a situation where interference components are increased and the capacity of the cell is reduced by the use of spread codes



for one cell under a plurality of conditions (for example, both the channelization code belonging to the primary scrambling code and the channelization code belonging to the secondary scrambling code are used for one cell). As a result, reduction of the system capacity can be prevented.

[0015]

[Embodiments of the Invention]

An embodiment according to the present invention will now be described.

[0016]

FIG. 1 shows a view of the configuration of a radio communication system 1 according to the present embodiment. As shown in this figure, the radio communication system 1 includes a base station 21 of frequency band f1, a base station 22 of frequency band f2, and a radio control station 10 that is connected to a core network 40 and controls the above-mentioned base stations 21 and 22. A cell of frequency band f1 formed by the base station 21 and a cell of frequency band f2 formed by the base station 22 are overlapped in the same area, in which a mobile station 30 is located. Although the mobile station 30, the cell and the base station 21, 22 which use each frequency band, and the radio control station 10 each appear once in FIG. 1, in general, more than one for each are located in the service area.

[0017]

The radio control station 10 comprises a channel

assignment request reception unit 11 for receiving a channel assignment request, a radio resource selection unit 12 for selecting radio resource (for example, channelization codes and the like as described later) for frequency band f1, a radio resource selection unit 13 for selecting radio resource for frequency band f2, a continuous selection determination unit 14 for determining whether selection should be made continuously in the processing described later, an output unit 15 for outputting a message indicating unavailable selection and the like, a channel assignment unit 16 for assigning channels, and a control unit 17 for carrying out operation control and status monitoring of each of the above-mentioned units.

[0018]

The radio resource selection unit 12 comprises a channelization code selection unit 12A for trying to select a channelization code belonging to frequency band f1, and a radio resource management unit 12B for controlling the usage condition and the like of channelization codes belonging to frequency band f1. In the same way, the radio resource selection unit 13 comprises a channelization code selection unit 13A for trying to select a channelization code belonging to frequency band f2, and a radio resource management unit 13B for controlling the usage condition and the like of channelization codes belonging to frequency band f2.

[0019]

In the description of the internal configuration of the radio control station 10 in FIG. 1, a solid arrow represents a linkage of processing and an instruction signal related to the linkage of processing, and a dashed arrow represents a control/monitoring signal produced by the control unit 17.

[0020]

Next, in accordance with a flow chart of FIG. 2, the processing in the radio control station 10 will be described. First, in the radio control station 10, when the channel assignment request reception unit 11 receives a channel assignment request (S01 in FIG. 2), the selection instruction signal for a channelization code is transmitted to the radio resource selection unit 12 for frequency band f1, and the channelization code selection unit 12A tries to select a channelization code belonging to the primary scrambling code in the cell of frequency band f1 (S02). At this time, the channelization code selection unit 12A inquires of the radio resource management unit 12B about the usage condition of channelization codes belonging to the primary scrambling code of frequency band f1. If the channelization code is unused, the channelization code is selected. If the channelization code is in use, the channelization code is not selected.

[0021]

If the selection has been successful in the selection trial at S02, the information of the selected channelization

code is outputted by the output unit 15 (S12), and the channel assignment unit 16 assigns a channel based on the selected channelization code (S13). The processing of FIG. 2 is then terminated.

5 [0022]

On the other hand, if the selection has been failed in the selection trial at S02 as described above, the flow then proceeds to S04, where an instruction signal is transmitted to the other radio resource selection unit 13, and the  
10 channelization code selection unit 13A tries to select a channelization code belonging to the primary scrambling code in the cell of frequency band f2. At this time, the channelization code selection unit 13A inquires of the radio resource management unit 13B about the usage condition of  
15 channelization codes belonging to the primary scrambling code of frequency band f2. If the channelization code is unused, the channelization code is selected. If the channelization code is in use, the channelization code is not selected.

20 [0023]

If the selection has been successful in the selection trial at S04 as described above, the information of the selected channelization code is outputted by the output unit 15 (S12), and the channel assignment unit 16 assigns a  
25 channel based on the selected channelization code (S13). The processing of FIG. 2 is then terminated.

[0024]

On the other hand, if the selection has been failed in the selection trial at S04, the flow then proceeds to S06, and the continuous selection determination unit 14 determines whether the selection trial of a channelization code should be carried out again. In this determination, it may be determined that the selection is always tried again, or it may be determined that the selection is not tried again in order to completely avoid the interference caused by the use of both the channelization code belonging to the primary scrambling code and the channelization code belonging to the secondary scrambling code for one cell.

[0025]

If it has been determined at S06 that the selection is not tried again, a message indicating “selectable channelization code not found” is outputted by the output unit 15 (S11), and the processing of FIG. 2 is terminated.

[0026]

On the other hand, if it has been determined at S06 that the selection is tried again, a selection instruction signal for a channelization code is transmitted to the radio resource selection unit 12 from the continuous selection determination unit 14, and the channelization code selection unit 12A tries to select a channelization code belonging to the secondary scrambling code in the cell of frequency band f1 (S07). At this time, the channelization code selection unit 12A inquires

of the radio resource management unit 12B about the usage condition of channelization codes belonging to the secondary scrambling code of frequency band f1. If the channelization code is unused, the channelization code is selected. If the  
5 channelization code is in use, the channelization code is not selected.

[0027]

If the selection has been successful in the selection trial at S07 as described above, the information of the  
10 selected channelization code is outputted by the output unit 15 (S12), and the channel assignment unit 16 assigns a channel based on the selected channelization code (S13). The processing of FIG. 2 is then terminated.

[0028]

15 On the other hand, if the selection has been failed in the selection trial at S07, the flow then proceeds to S09, where an instruction signal is transmitted to the other radio resource selection unit 13, and the channelization code selection unit 13A tries to select a channelization code  
20 belonging to the secondary scrambling code in the cell of frequency band f2. At this time, the channelization code selection unit 13A inquires of the radio resource management unit 13B about the usage condition of channelization codes belonging to the secondary scrambling code of frequency  
25 band f2. If the channelization code is unused, the channelization code is selected. If the channelization code is

in use, the channelization code is not selected.

[0029]

If the selection has been successful in the selection trial at S09 as described above, the information of the selected channelization code is outputted by the output unit 15 (S12), and the channel assignment unit 16 assigns a channel based on the selected channelization code (S13). The processing of FIG. 2 is then terminated.

[0030]

On the other hand, if the selection has been failed in the selection trial at S09, a message indicating "selectable channelization code not found" is outputted by the output unit 15 (S11), and the processing of FIG. 2 is terminated.

[0031]

As described above, the processing in FIG. 2 allows channelization codes belonging to the primary scrambling code to be preferentially selected across the cells of all frequency bands. This can prevent a situation where interference components are increased and the capacity of the cell is reduced by the use of both the channelization code belonging to the primary scrambling code and the channelization code belonging to the secondary scrambling code. As a result, reduction of the system capacity can be prevented.

[0032]

Although the case of two frequency bands f1 and f2 has

been described as an example in the above embodiment, the same applies to the case where three or more frequency bands are used. Moreover, although the case has been described by way of example where the frequency band f1 has a higher preference than the frequency band f2, the same applies to the case where, to the contrary, the frequency band f2 has a higher preference than the frequency band f1.

[0033]

Moreover, although an application to a radio communication system including a plurality of cells has been described above, the present invention is applicable not only to cells but also to sectors.

[0034]

#### [Effects of the Invention]

As described above, according to the present invention, instead of trying to select a spread code for one cell under a plurality of conditions in a conventional manner, selection of a spread code is tried sequentially for a plurality of cells under a predetermined condition. When it is determined that the selection of the spread code should be tried again under a different condition, selection of the spread code is tried under the different condition. This can prevent a situation where interference components are increased and the capacity of the cell is reduced by the use of spread codes for one cell under a plurality of conditions (for example, both the channelization code belonging to the primary scrambling code and the



channelization code belonging to the secondary scrambling code are used for one cell). As a result, reduction of the system capacity can be prevented.

[Brief Description of the Drawings]

5 [Fig. 1]

FIG. 1 is a view of the configuration of a radio communication system according to an embodiment of the invention.

[Fig. 2]

10 Fig. 2 is a flow chart showing the process in the radio control station.

[Fig. 3]

Fig. 3 is a flow chart showing a conventional channelization code selection process.

15 [Explanation of Reference Numerals]

1 is for radio communication system; 10 is for radio control station; 11 is for channel assignment request reception unit; 12, 13 are for radio resource selection unit; 12A, 13A are for channelization code selection unit; 12B, 13B are for radio resource management unit; 14 is for continuous selection determination unit; 15 is for output unit; 16 is for channel assignment unit; 17 is for control unit; 21, 22 are for base station; 30 is for mobile station; 40 is for core network.

20


[Document Name] ABSTRACT


[Abstract]

[Problem] The object of the invention is to prevent reduction of the system capacity caused by the use of a channelization code belonging to the secondary scrambling code.

[Means of Solution] Instead of trying to select a channelization code belonging to each of the primary and secondary scrambling codes for one cell in a conventional manner, selection of a channelization code belonging to the primary scrambling code is tried sequentially for a plurality of cells (S02, S04). If the selection of the code has been failed, it is determined whether selection is tried again under a different condition (S06). Then, when trying again, selection of a channelization code belonging to the secondary scrambling code is tried sequentially for the plurality of cells (S07, S09).

[Selected Drawing] Fig. 2

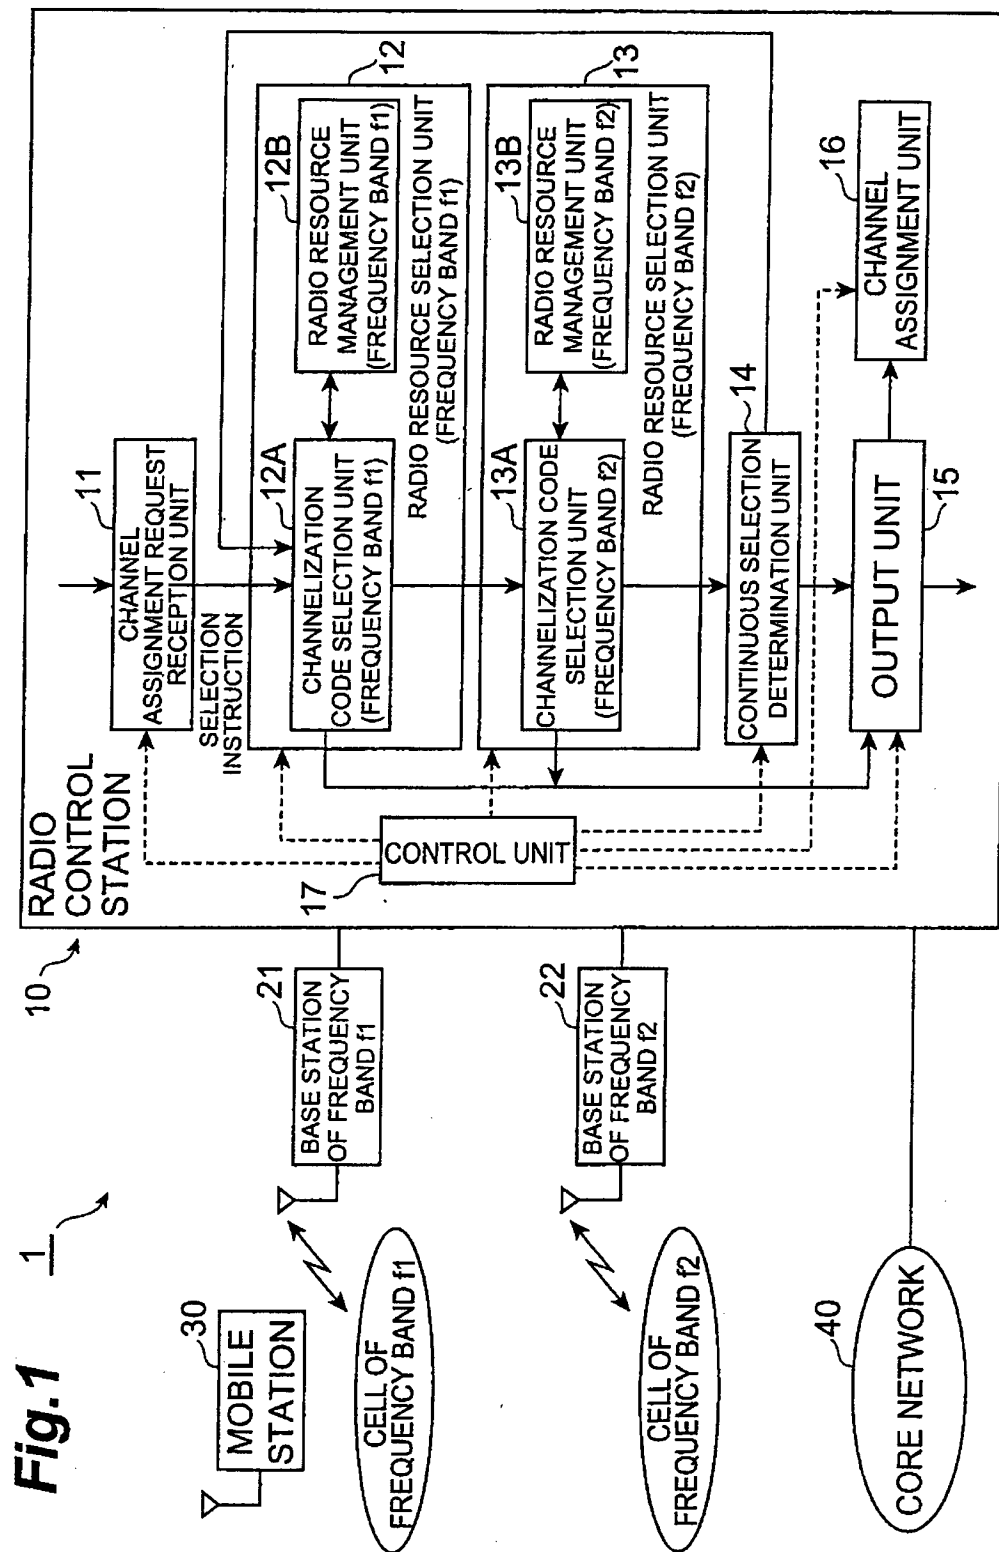

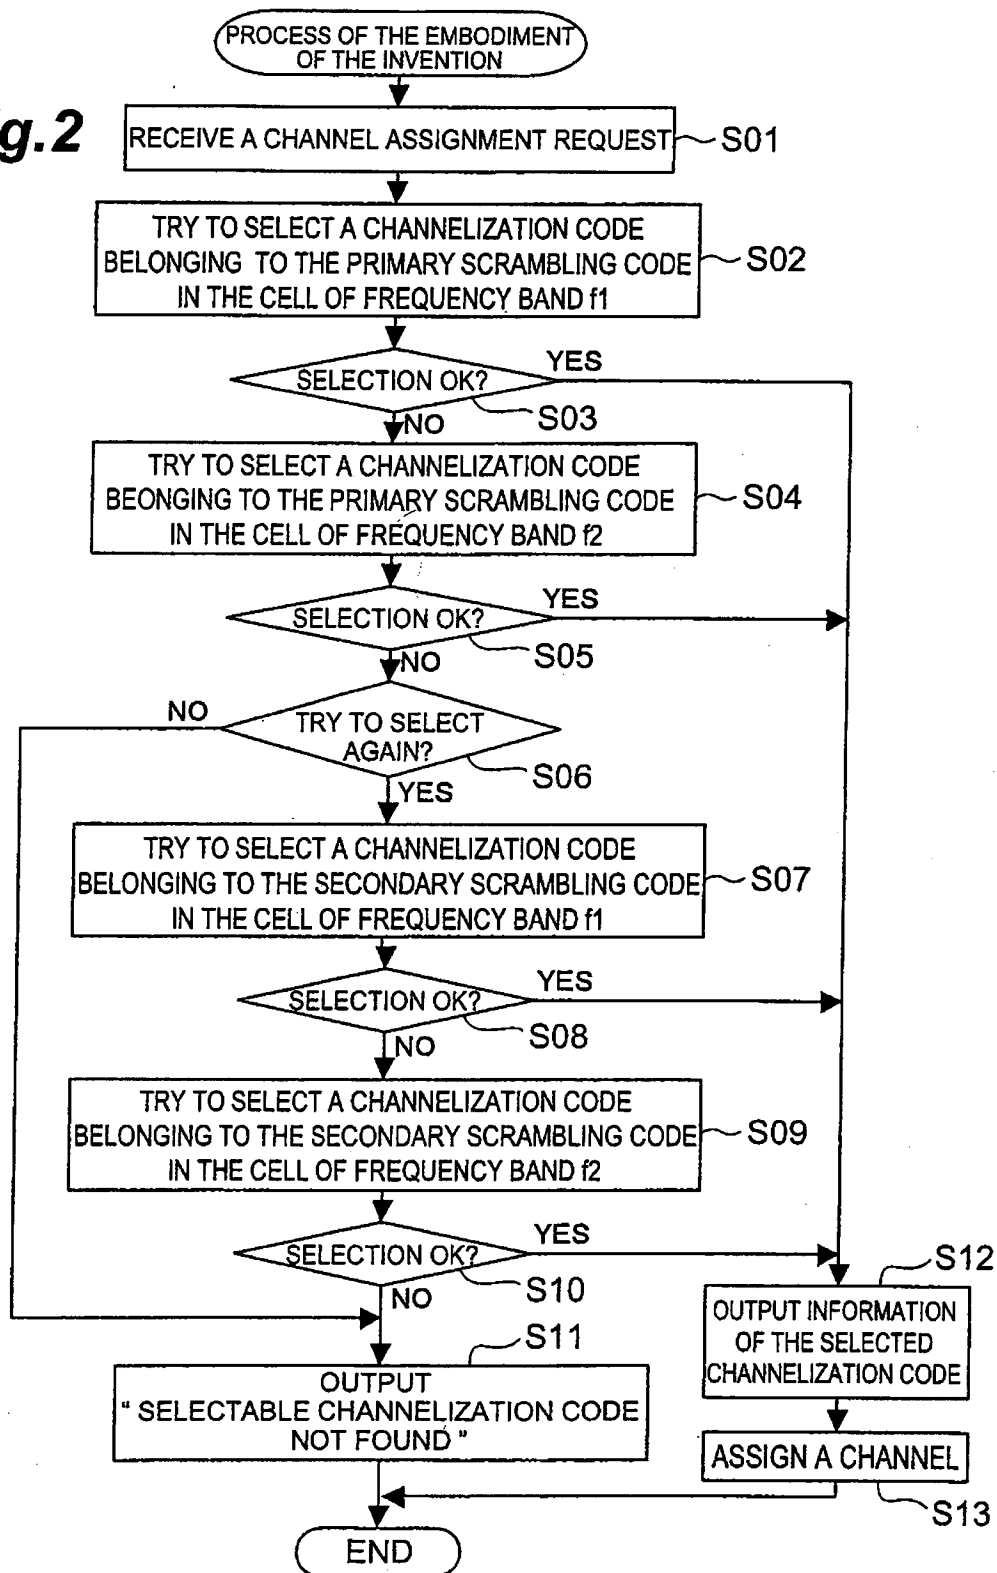**Fig.2**

**Fig.3**